


PT0408-111-Q/PT0610-111-Q PT0612-111-Q

CORELESS DC MICRO MOTOR

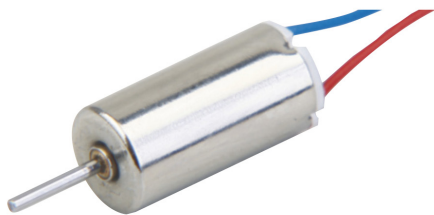

4D x 8mmL (0.16D x 0.31inL)
6D x 10mmL (0.24D x 0.39inL)
6D x 12mmL (0.24D x 0.47inL)

VOLTAGE	2.5~3.4V
HOUSING LENGTH	8.0~12.2mm (0.31~0.48in)
DIAMETER	4.0~6.0mm (0.16x 0.24in)
SHAFT LENGTH	12.3~18.1mm (0.48~0.71in)
SPEED (NO LOAD)	26000~46000 RPM
CURRENT (NO LOAD)	30~75mA
OPERATING TEMPERATURE	-20°C ~+60°C

MODEL NUMBER	RATED VOLTAGE		NO LOAD		RATED	
	NOMINAL		SPEED	CURRENT	SPEED	CURRENT
	V		RPM	mA	RPM	mA
PT0408-111-Q	2.6		42000	35	15000	85
PT0610-111-Q	2.5		26000	30	13000	130
PT0612-111-Q	3.4		46000	75	36000	300

UNIT: mm

