


JQF3-060A

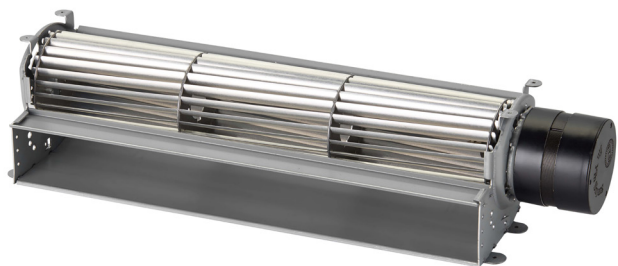

J SERIES DC CROSSFLOW FAN

| | |
|----------------|--------------------------------------|
| VOLTAGE | 24V |
| BEARINGS | Ball Bearings |
| MOTOR | DC Brushless Type 3-phase |
| IMPELLER | Aluminum Alloy |
| LENGTH (C) | Min 6.7in (170mm), Max 16.9in (430m) |
| AIRFLOW | 64~198 CFM (1.8~5.6 m³/min) |
| OPERATING TEMP | 0°C~45°C |
| OPERATING LIFE | 30,000 hours @ 40°C |

| Model Number | | inches (mm) | | | | V | A | RPM | Pressure (P) | | Airflow (Q) | | dBA | g |
|------------------|---|---------------|---------------|---------------|-------------|----|------|------|--------------|--------------------|-------------|-----|-----|-----|
| | | A | B | C | D | | | | mmAq | inH ₂ O | m³/min | CFM | | |
| JQF3-06012A24-3B | ① | 4.7 (120) | 5.1 (130) | 6.7 (170) | 1.5 (38) | 24 | 0.24 | 2000 | 6.4 | 0.25 | 1.8 | 64 | 49 | 400 |
| JQF3-06018A24-3B | ② | 7.1 (180) | 7.5 (190) | 9.1 (230) | 1.5 (38) | 24 | 0.28 | 1600 | 4.6 | 0.18 | 2.2 | 78 | 44 | 570 |
| JQF3-06024A24-3B | ③ | 9.4 (240) | 9.8 (250) | 12.2 (310) | 2.2 (56) | 24 | 0.51 | 2000 | 6.1 | 0.24 | 3.9 | 138 | 49 | 790 |
| JQF3-06030A24-3B | ④ | 11.8 (300) | 12.2 (310) | 14.6 (370) | 2.2 (56) | 24 | 0.59 | 1850 | 5.5 | 0.22 | 4.7 | 166 | 47 | 860 |
| JQF3-06036A24-3B | ⑤ | 14.2 (360) | 14.6 (370) | 16.9 (430) | 2.2 (56) | 24 | 0.66 | 1750 | 5.3 | 0.21 | 5.6 | 198 | 46 | 950 |

