

# JE3-050A/JF3-050A


## J SERIES DC CROSSFLOW FAN



SINGLE BLOWER

VOLTAGE	24V
BEARINGS	Ball Bearings
MOTOR	DC Brushless Type 3-phase
IMPELLER	Aluminum Alloy
LENGTH (C)	Min 5.8in (148mm), Max 36.5in (926mm)
AIRFLOW	46~254 CFM (1.3~7.2 m³/min)
OPERATING TEMP	0°C~45°C
OPERATING LIFE	30,000 hours @ 40°C

Model Number		inches (mm)				V	A	RPM	Pressure (P)		Airflow (Q)		dBA	g	Blower
		A	B	C	D				mmAq	inH <sub>2</sub> O	m³/min	CFM			
JE3-05009A24-3B	①	3.9 (98)	4.3 (108)	5.8 (148)	1.5 (38)	24	0.13	2600	5.9	0.23	1.3	46	37	370	Single
JE3-05019A24-3B	②	7.8 (198)	8.2 (208)	9.8 (248)	1.5 (38)	24	0.31	2500	4.7	0.19	2.5	88	43	470	Single
JE3-05029A24-3B	③	11.7 (298)	12.1 (308)	13.7 (348)	1.5 (38)	24	0.35	2200	4.3	0.17	3.5	124	44	590	Single
JE3-05035A24-3B	④	14.1 (358)	14.5 (368)	16.1 (408)	1.5 (38)	24	0.26	1800	3.7	0.15	3.8	134	36	660	Single
JE3-05042A24-3B	⑤	16.8 (428)	17.2 (438)	18.8 (478)	1.5 (38)	24	0.27	1700	3.3	0.13	4.2	148	35	730	Single
JF3-05042A24-3B	⑥	16.9 (430)	17.3 (440)	19.1 (486)	2.2 (56)	24	0.36	2050	2.1	0.08	4.0	141	43	850	Single
JF3-05052A24-3B	⑦	20.9 (530)	21.3 (540)	23.1 (586)	2.2 (56)	24	0.39	2000	2.1	0.08	5.0	177	43	960	Single
JF3-05060A24-3B	⑧	24.0 (610)	24.4 (620)	26.2 (666)	2.2 (56)	24	0.44	1900	1.9	0.07	5.4	191	42	1020	Single
JF3-5035X2A24-3B	⑨	28.7 (730)	29.1 (740)	30.9 (786)	2.2 (56)	24	0.47	1900	2.0	0.08	6.3	222	42	1210	Double
JF3-5042X2A24-3B	⑩	34.3 (870)	34.6 (880)	36.5 (926)	2.2 (56)	24	0.52	1800	1.8	0.07	7.2	254	42	1350	Double

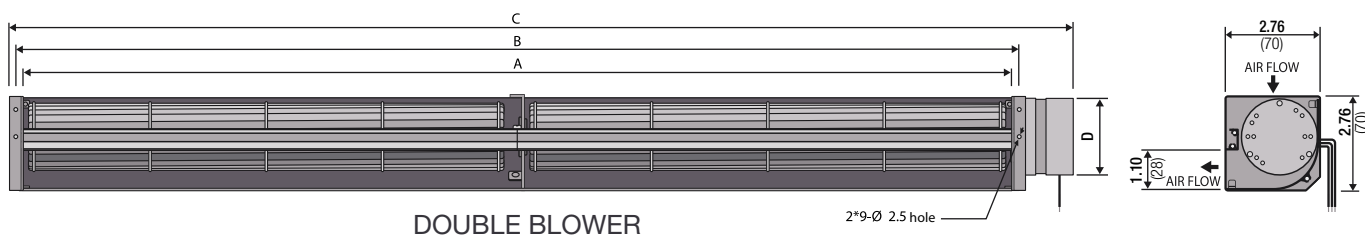

DOUBLE BLOWER

